6X Zoom Conference Camera

P06U4A 6X Optical Zoom Conference Camera,4K Wide-Angle Webcam with Dual Lens PTZ Camera,Auto Framing,
Motorized Privacy Cover, Remote Control,USB PTZ Camera for Video Conferences,
Recording and Streaming.

6X optical zoom

6X optical zoom，Sleek and intelligent design，Plug & Play USB Connectivity.

Wide viewing angles

Wide viewing angles of view with no video distortion

Accurate, smooth and silent ptz movement

P06U4A PTZ Conference Camera can be controlled remotely to rotate 350° (±175°) horizontally and 180°(±90°) vertically in an accurate, smooth and silent way. It is also supportive of 9 presets setting through the IR Remote Control and is available to set up to 255 presets via RS232 and RS485 interfaces for professional control. The convenient way could quickly control the PTZ camera pan, tilt, zoom, and move to the preset position for close-up sequence.

Privacy protection, fully automatic control, protection of user privacy

During non-meeting times, the panoramic camera remains off by default, while the long-focus camera automatically flips downwards. When a meeting begins, the panoramic camera's privacy cover automatically opens, and the long-focus camera wakes up, maintaining an efficient and secure video conference experience.

4K 4K/120°/6x optical zoom camera

AI Face tracking
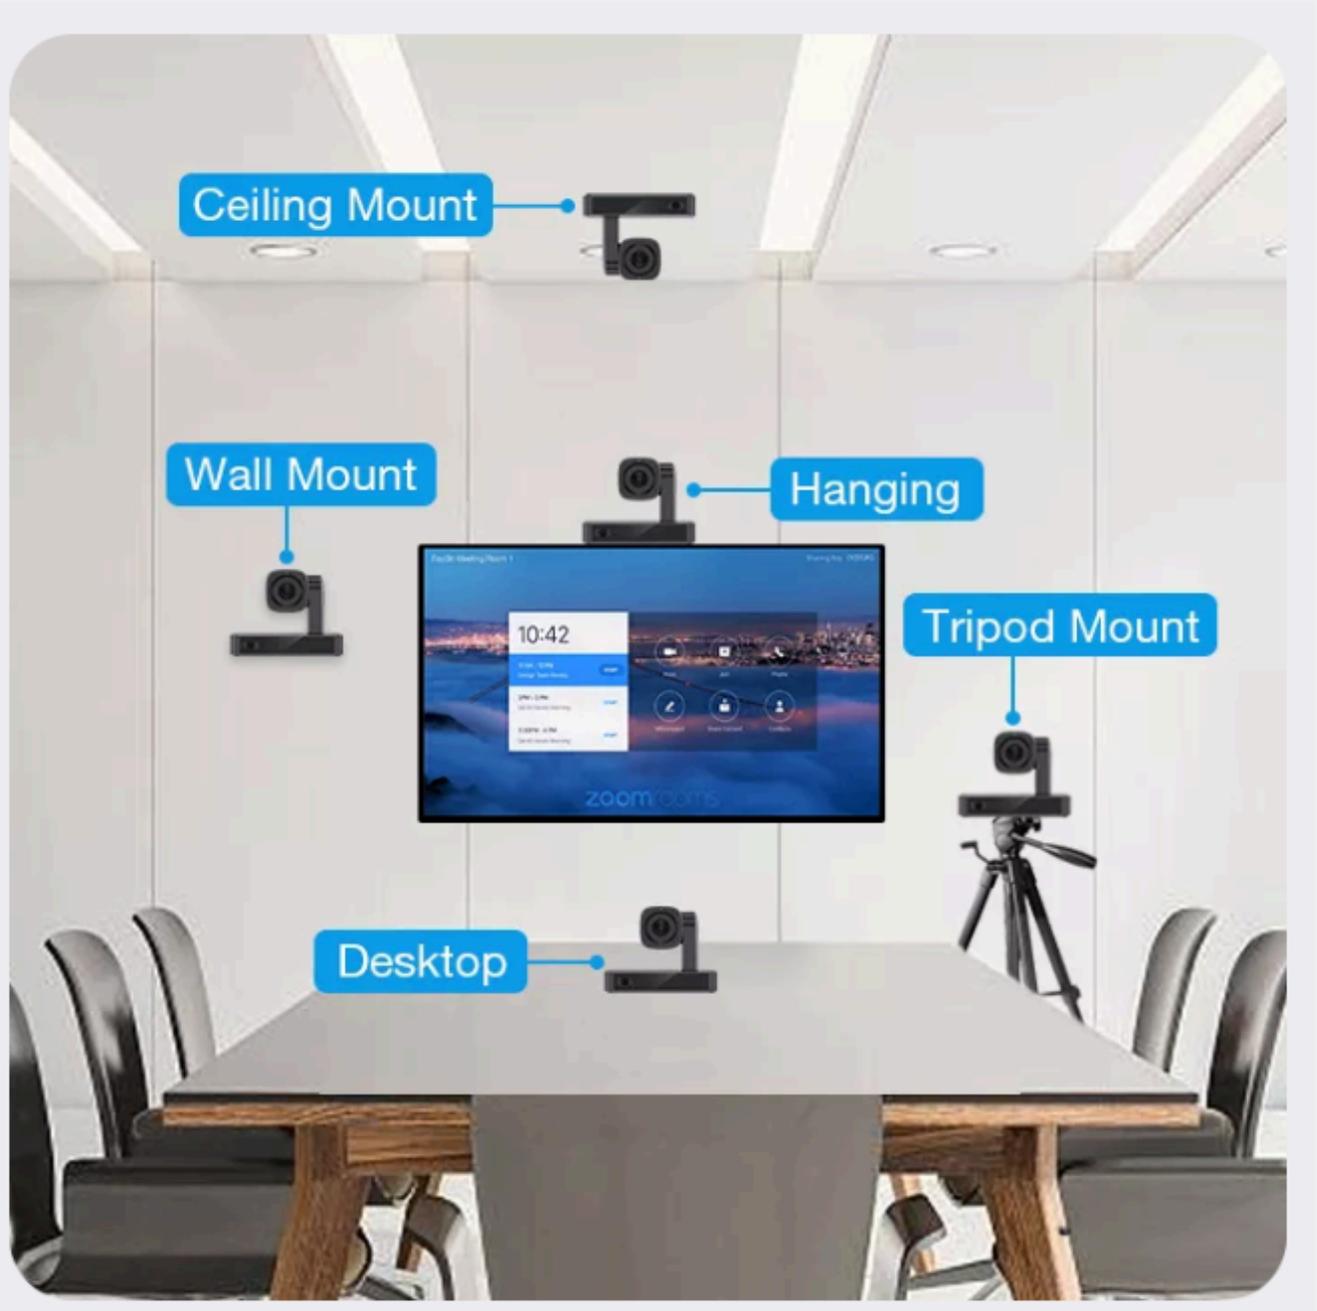
Auto focus

Gesture control

Dual camera system

Audio integration

Multiple Installations

Support multiple mount way: available to install on desk, monitor, wall, tripod or up-side down in-ceiling.

Compatible Software

Compatible with all video conference software, like Zoom, Skype, Go TO Meeting; Webex, MS Team, and Bluejeans.

① Camera indicator
② 4K PTZ Camera
③ Panoramic camera
④ 4 Microphone array

⑤ IR Receiver Port
⑥ 1/4 UNC threaded hole
⑦ Line in
⑧ Debug

⑨ USB3.0 Type B port
⑩ RS485 port
⑪ R232 port(out)
⑫ R232 port(in)
⑬ Power port

Product specification

Product model

P06U4A

Camera

• Dual Lens PTZ Camera

• Video output: 4K 30FPS;

1080P 60/50/30/25/59.94/29.97FPS；

720P 60/50FPS

• Focal Length: F=2.38-7mm F=2.0

• Automatically frame portraits

• Panoramic camera

• Zoom: 6x zoom

• View Angle: 120 degree

• Comes with a motorized privacy cover

• Preset Position: IR Remote-controller supports 9 presets,PELCO Control Protocal supports 255 presets.

• Pan/Tilt Movement Range:

• Horizontal rotation: 350°,

• Vertical rotation: 180°

• Control Terminal: RS-232, RS-485

• Control Protocol: VISCA, PELCO-D, PELCO-P(RS-232, RS-485)

• Video Output: USB

• Noise Reduction: Yes

• Work Temperature: -10°~50°

• Work Humidity: -20°~60°

• Remote control: Yes

• Wall-mounted shelf：Yes

• Decoder: Built-in decoder

• Installation: Support desktop, Tripod, Wall mount and ceiling mount

• Video Compression Format:YUV,MJPEG,H.264

• Accessories: DC 12V power adaptor,IR remote control, manual,USB 2.0 cable, ceiling brackets and screws

• Dimension: 200x160x160mm